545 E Algonquin Road, Suite H
Arlington Heights, IL 60005 USA

Telephone: 847-439-5667
intertek.com

Published: 3-Nov-26
Revised:

Counterfeit Intertek Certification Certificate

Ramkor International - Strebord 54 - FD60 Particle Board Core Door, Spec ID: 42945

Notification Type:	Counterfeiting
Certification Type:	Not Intertek Certified

Notification

Intertek notifies consumers, retailers and distributors that we have been made aware of counterfeit Intertek certificates in the marketplace as identified below claiming products are Intertek Certified.

Company Identification

Mono Creative Pieces Contracting Co

Product Identification

A counterfeit document Certificate of Compliance, Ramkor International - Strebord 54 - FD60 Particle Board, Spec ID: 42945, 30 min fire rating. Dated December 9, 2018 and expires December 31, 2026. Certificate Photos on Page 2.

Hazard Involved

Not Intertek Certified.


What To Do

Use should be immediately discontinued and return to the point of purchase. Distributors and retailers should discontinue sales and return inventories to their suppliers.

545 E Algonquin Road, Suite H
Arlington Heights, IL 60005 USA

Telephone: 847-439-5667
intertek.com

Photos and Images

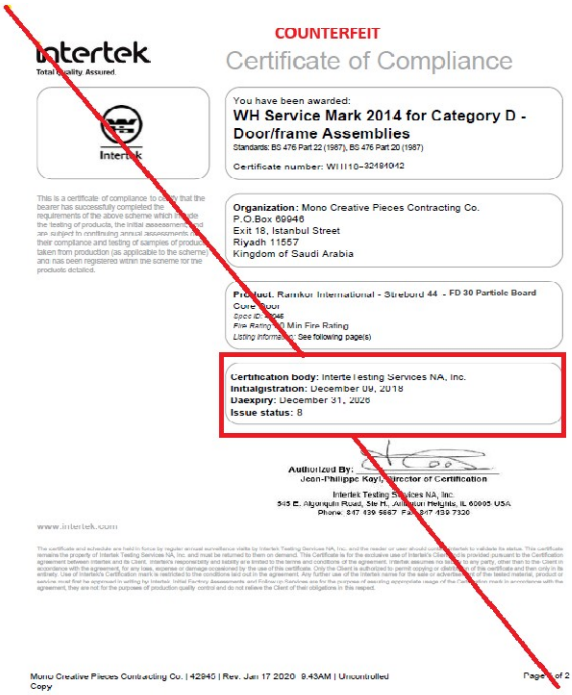

COUNTERFEIT

Certificate of Compliance

You have been awarded:
WH Service Mark 2014 for Category D - Door/frame Assemblies
Standards: BS 476 Part 22 (1987), BS 476 Part 20 (1987)
Certificate number: WH110-32494042

Organization: Mono Creative Pieces Contracting Co.
P.O.Box 69946
Exit 18, Istanbul Street
Riyadh 11557
Kingdom of Saudi Arabia

Product: Ramkor International - Strebord 44 - FD 30 Particle Board Core Door
Spec ID: 42945
Fire Rating: 30 Min Fire Rating
Listing Information: See following page(s)


Certification Body: Intertek Testing Services NA, Inc.
Initialgistration: December 09, 2015
Daexpry: December 31, 2026
Issue status: 8

Authorized By:
Jean-Philippe Kay, Director of Certification
Intertek Testing Services NA, Inc.
545 E. Algonquin Road, Ste H., Arlington Heights, IL 60005 USA
Phone: 847 439 5667 Fax: 847 439 7330

www.intertek.com

Mono Creative Pieces Contracting Co. | 42940 | Rev: Jan 17 2020 9:43AM | Uncontrolled Copy

Page 1 of 2

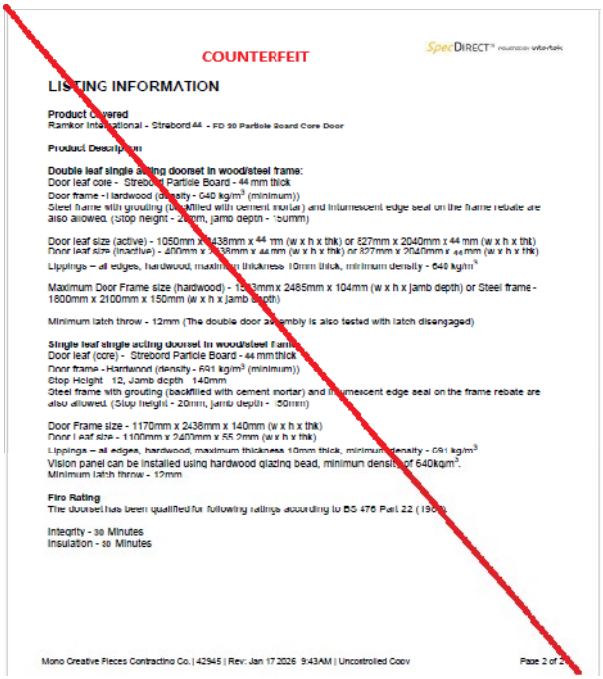

COUNTERFEIT

SpecDIRECT

LISTING INFORMATION

Product Covered
Ramkor International - Strebord 44 - FD 30 Particle Board Core Door

Product Description

Double leaf single acting doorset in wood/steel frame:
Door leaf core - Strebord Particle Board - 44 mm thick
Door frame - Hardwood (density - 640 kg/m³ (minimum))
Steel frame with grouting (backfilled with cement mortar) and intumescent edge seal on the frame rebate are also allowed. (Stop height - 20mm, jamb depth - 50mm)

Door leaf size (active) - 1050mm x 2438mm x 44 mm (w x h x thk) or 827mm x 2040mm x 44 mm (w x h x thk)
Door leaf size (inactive) - 450mm x 2438mm x 44 mm (w x h x thk) or 827mm x 2040mm x 44mm (w x h x thk)
Lippings – all edges, hardwood, maximum thickness 10mm thick, minimum density - 640 kg/m³

Maximum Door Frame size (hardwood) - 1503mm x 2485mm x 104mm (w x h x jamb depth) or Steel frame - 1800mm x 2100mm x 150mm (w x h x jamb depth)

Minimum latch throw - 12mm (The double door assembly is also tested with latch disengaged)

Single leaf single acting doorset in wood/steel frame:
Door leaf (core) - Strebord Particle Board - 44 mm thick
Door frame - Hardwood (density - 691 kg/m³ (minimum))
Stop Height - 12, Jamb depth - 140mm
Steel frame with grouting (backfilled with cement mortar) and intumescent edge seal on the frame rebate are also allowed. (Stop height - 20mm, jamb depth - 50mm)

Door Frame size - 1170mm x 2438mm x 140mm (w x h x thk)
Door Leaf size - 1100mm x 2400mm x 55.2mm (w x h x thk)
Lippings – all edges, hardwood, maximum thickness 10mm thick, minimum density - 691 kg/m³
Vision panel can be installed using hardwood glazing bead, minimum density of 640kg/m³.
Minimum latch throw - 12mm

Fire Rating
The doorset has been qualified for following ratings according to BS 476 Part 22 (1987):

Integrity - 30 Minutes
Insulation - 30 Minutes

Mono Creative Pieces Contracting Co. | 42945 | Rev: Jan 17 2026 9:43AM | Uncontrolled Copy

Page 2 of 2